



### **371000 (E7GCGD2C00)**

2-Burner (5,5 kW each) gas Boiling Top

## **Main Features**

- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- IPx4 water protection.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Protected pilot light
- The two 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Pan supports in cast iron are washable in a dishwasher.
- Suitable for countertop installation.

## **Construction**

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.



## Optional Accessories

PNC Code	Description
<b>Bridge supports</b>	
206137	Support for bridge type installation, 800mm
206138	Support for bridge type installation, 1000mm
206139	Support for bridge type installation, 1200mm
206140	Support for bridge type installation, 1400mm
206141	Support for bridge type installation, 1600mm
206154	Support for bridge type installation, 400mm
<b>Burner grids, plates, supports</b>	
206260	Single burner smooth plate for direct cooking - fits frontal burners only
206261	Single burner ribbed plate for direct cooking- fits frontal burners only
206264	Single burner radiant plate for pan support
206297	Stainless steel double grid for 2 burners
206363	Wok pan support for open burners (700/900)
<b>Chimney upstands</b>	
206126	Draught diverter, 120 mm diameter
206127	Matching ring for flue condenser, 120 mm diameter
206303	Chimney upstand, 400mm
206310	Flue condenser for 1/2 module, 120 mm diameter
<b>Gas nozzles</b>	
206387	Kit town gas nozzles (G150) for 700 gas range
206460	Kit G.25.3 (NI) gas nozzles for 700 top and - freestanding on oven - gas cookers
<b>Handrails</b>	
206307	Right and left side handrails
206308	Back handrail 800 mm
216046	Frontal handrail, 400mm
216047	Frontal handrail, 800mm
216049	Frontal handrail, 1200mm
216050	Frontal handrail, 1600mm
216185	Large handrail - portioning shelf, 400mm
216186	Large handrail - portioning shelf, 800mm
<b>Installation solutions</b>	
206086	Junction sealing kit
<b>Other accessories</b>	
927225	Pressure regulator for gas units
<b>Panels</b>	
216277	2 side covering panels for top appliances




PNC Code	Description
<b>Water taps</b>	
206289	Water column with swivel arm (water column extension not included)
206291	Water column extension for 700 line



# Technical specifications

Gas	
Gas Power:	11 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG; Natural Gas; Town
Gas Inlet:	1/2"
Key Information:	
External dimensions, Width:	400 mm
External dimensions, Depth:	730 mm
External dimensions, Height:	250 mm
Net weight:	20 kg
Shipping weight:	28 kg
Shipping height:	530 mm
Shipping width:	460 mm
Shipping depth:	800 mm
Shipping volume:	0.2 m <sup>3</sup>
Front Burners Power:	5.5 - 0 kW
Back Burners Power:	5.5 - 0 kW
Certification group:	N7CG
Back Burners Dimension - mm	Ø 60
Front Burners Dimension - mm	Ø 60

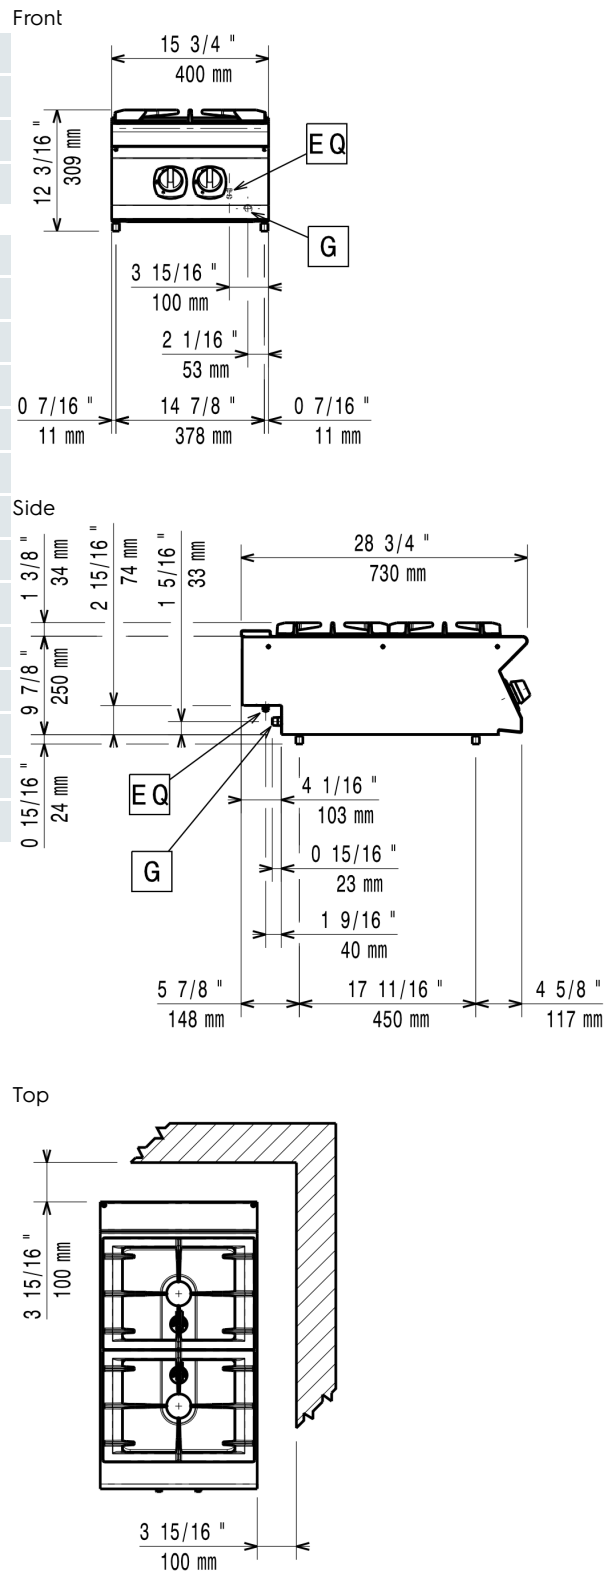

G = Gas connection



Find out more:  
 ISO Certificates  
 Electrolux Professional Recognitions

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

04/03/2026