



371266 (E7GREDGS0P)

Half module electric Grill Top - HP

Main Features

- Incoloy armoured heating elements positioned under the cooking grid.
- Power indicator light.
- Each bank of elements has an independent power regulation through a control knob.
- Heating elements tilt 90° for easy cleaning.
- Removable 2mm thick steel U-shaped grids in AISI 441 stainless steel for fast heating of cooking surface.
- Fixed well with drain to collect residual cooking juices and grease.
- Large drain protected by overflow and filter.
- Water must be added to well before operation.
- Water filling tap with knob control.
- Removable stainless steel deflectors to recuperate heat and reduce cooking time.
- Stainless steel splash guards on sides of cooking surface. Splash guards can be easily removed for cleaning.
- Led warning indicator to give an alarm when well is empty.
- Top configuration can be installed on refrigerated / freezer base with limited layout options.
- Suitable for countertop installation.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 730mm deep to give a larger working surface area

Included Accessories

PNC Code	Description	Quantity
206436	Scraper for HP electric grill	1



Optional Accessories

PNC Code	Description
Bases & base accessories	
206257	2 supports with runners for open base for 4 GN1/1
Bridge supports	
206137	Support for bridge type installation, 800mm
206138	Support for bridge type installation, 1000mm
206139	Support for bridge type installation, 1200mm
206140	Support for bridge type installation, 1400mm
206141	Support for bridge type installation, 1600mm
206154	Support for bridge type installation, 400mm
Cleaning solutions	
206436	Scraper for HP electric grill
Drains	
206437	Drain extension for Electric grill HP
Handrails	
206307	Right and left side handrails
206308	Back handrail 800 mm
216046	Frontal handrail, 400mm
216047	Frontal handrail, 800mm
216049	Frontal handrail, 1200mm
216050	Frontal handrail, 1600mm
216185	Large handrail - portioning shelf, 400mm
216186	Large handrail - portioning shelf, 800mm
Installation solutions	
206086	Junction sealing kit
Panels	
216277	2 side covering panels for top appliances



Technical specifications


Electric

Supply voltage:	400-415 V/3N ph/50/60 Hz
Electrical power max.:	3.75 kW
Predisposed for:	


Key Information:

External dimensions, Width:	400 mm
External dimensions, Depth:	730 mm
External dimensions, Height:	250 mm
Net weight:	35 kg
Certification group:	HEG7E1
Cooking surface width:	345 mm
Cooking surface depth:	400 mm


Front



Side

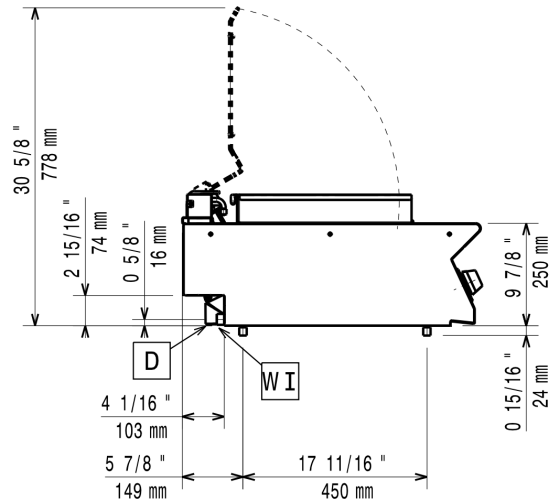

Top

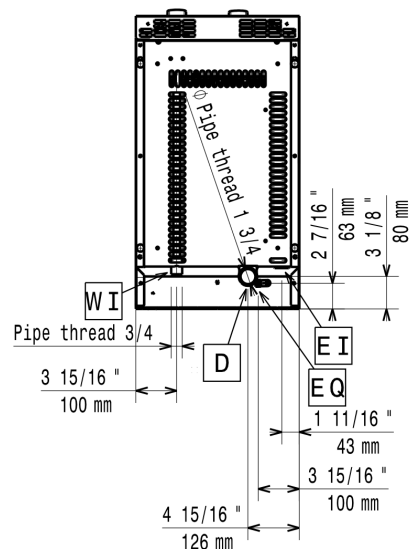

D = Drain

EI = Electrical inlet (power)

EQ = Equipotential screw



Find out more:
ISO Certificates
Electrolux Professional Recognitions

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026/06/25

3/3