

**601009 (MSGA30G)**

Gravity Slicer 300mm, gear transmission - SEMI-automatic (230V; 1+N; 50) Slice counter available as optional, to be ordered as an S-code

Main Features

- Cut thickness-adjusting knob (millimeter adjustment).
- Highest degree of safety in functioning, cleaning and maintenance.
- Supplied with blade removal tool.
- Top-mounted stone blade sharpener and cover blade easy to remove.
- Ventilated blade drive motor designed for continuous use, with gear drive system for heavy and continuous daily operations.
- Removable carriage system permanently lubricated with automatic clutch.
- Slice thickness from 0 to 24 mm.
- Gear driven transmission permanently oil-lubricated.
- Cutting capacity for 300 mm model: - square: 180x180 - rectangular: 230x165 - round: 200
- Semi-Automatic gravity slicer - can be used in automatic or manual operation.
- The slicer has an automatic carriage movement mode that can be activated by half turning the "manual-automatic" knob under the carriage support. Even when using the machine in manual mode, there is no friction caused by the automatic system in the carriage movement, making it just like in any other completely manual slicer. The automatic system has been designed to have the carriage move more slowly when cutting the slice and quicker when returning in position: this allows to have perfectly cut slices, even the thinnest ones, and minimum product waste, unlike automatic systems that cut products quicker.
- "Slicer counter" function is available as special feature.

Construction

- IP42 water protection.
- Made in high polished satin finished anodized aluminium. This procedure guarantees high hygienic standards of the parts interested by the cut and resistance to acids, salts and oxidation processes.
- Plexiglass safety hand guard as standard.
- The blade is made of hollow ground hard chrome with blade guard ring for added protection.
- Compact design.



Technical specifications


Electric

Supply voltage:	230 V/1N ph/50 Hz
-----------------	-------------------


Key Information:

External dimensions, Width:	760 mm
External dimensions, Depth:	520 mm
External dimensions, Height:	590 mm
Net weight (kg):	49

Front

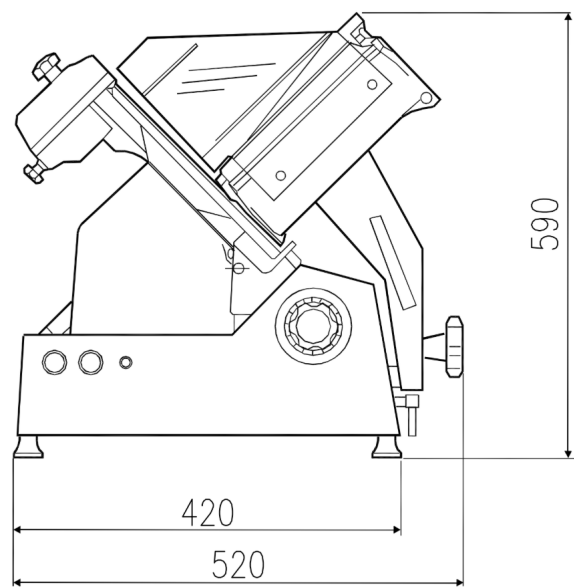

Side

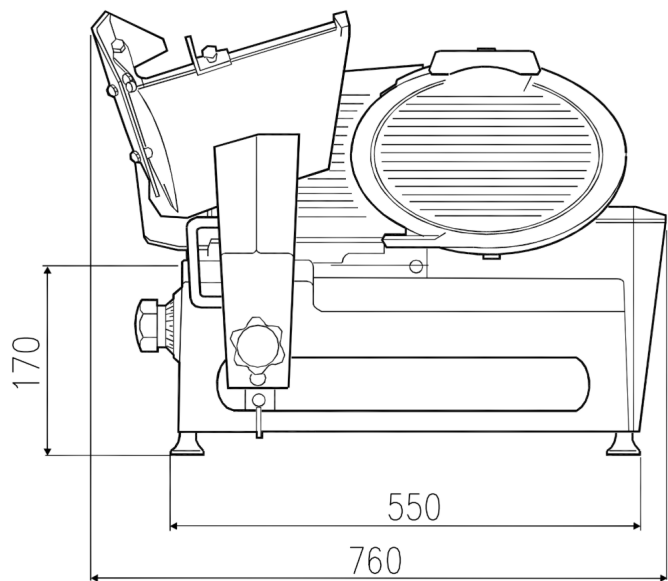

EI = Electrical inlet (power)



Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.