

**602150 (VGSUS)**

Vegetable Slicer with variable speed 500-1200 rpm, Schuko plug

Main Features

- All parts in contact with food are removable without the use of tools, completely dismountable and dishwasher safe.
- Easy to clean and waterproof control panel with flat on/off button and pulse function.
- Continuous feed model.
- Vegetable slicer with slicing, grating, shredding (julienne) as well as dicing and French fries cutting capability.
- ErgoCert 4-star certification for ergonomic design and ease of use.
- Productivity up to 100 settings per service.
- Equipped with half moon hopper (1,25lt capacity) and 2 small round feed chutes: Ø 25mm and Ø 55mm, for precise slicing of long shaped vegetables.
- Uniform cuts and maximised load capacity, thanks to the design patented lever-pusher.
- Large output chute for efficient ejection. Fits up to 200mm high standard kitchen containers (like GN) under the output chute.
- Pulse function for quick and precise slicing and grating.
- Ergonomical frontal lever, suitable for left handed and right handed operators.
- Vegetable slicer blade stops when lever pusher is lifted for operator safety.
- Optional discs and grids available of various sizes for slicing, dicing, grating and shredding (diam. 175mm).
- Flexibility for high quality cuts: 5-level variable speed (500-1200 rpm) can be adjusted according to consistency of ingredients.

Construction

- IPX5 (IP55) waterproof, flat, touch-control panel.
- Asynchronous industrial motor with no brushes for high reliability and quiet functioning, stainless steel motor shaft.
- Main switch ON/OFF on the back of the appliance.
- Motor power: 750 Watt.
- compact design, easy to move and store.
- Food safety assured in accordance to European directives and UK legislation. In addition, materials in contact with food, are BPA-free.
- Product safety conform to European directives, UK legislation and international health and safety standards.



Included Accessories

PNC Code	Description	Quantity
650232	Ejector for Vegetable Slicer	1

Optional Accessories

PNC Code	Description
----------	-------------

Discs/grids 175mm

650196	Kit including 3 discs dia. 175mm (slicer 2mm, slicer 5mm, grater 3mm)
650197	Kit including 6 discs dia. 175mm (slicer 2mm, slicer 5mm, grater 3mm, grater 7mm, slicer 10mm, grid 10x10mm)
650198	Stainless steel grating disc 2 mm (dia. 175mm)
650199	Stainless steel grating disc 3 mm (dia. 175mm)
650205	Stainless steel grating disc 4 mm (dia. 175mm)
650207	Stainless steel grating disc 7 mm (dia. 175mm)
650208	Parmesan Disc
650209	Stainless steel shredding disc 2x2 mm (dia. 175mm)
650210	Stainless steel shredding disc 4x4 mm (dia. 175mm)
650211	Stainless steel shredding disc 8x8 mm for French fries (dia. 175mm)
650213	Stainless steel slicing disc 1 mm (dia. 175mm)
650214	Stainless steel slicing disc 2 mm (dia. 175mm)
650215	Stainless steel slicing disc 3 mm (dia. 175mm)
650216	Stainless steel slicing disc 5 mm (dia. 175mm)
650217	Stainless steel slicing disc 6 mm (dia. 175mm)
650218	Stainless steel wavy slicing disc 3 mm (dia. 175mm)
650219	Stainless steel wavy slicing disc 5 mm (dia. 175mm)
650220	Aluminum slicing disc 8 mm (dia. 175mm)
650221	Aluminum slicing disc 10 mm (dia. 175mm)
650222	Dicing grid 8x8 (dia 175mm)
650223	Dicing grid 10x10 (dia 175mm)
650224	Dicing kit 8mm (aluminum slicer 8mm, grid 8x8mm) (dia. 175mm)
650225	Dicing kit 10mm (aluminum slicer 10mm, grid 10x10 mm) (dia. 175mm)
650232	Ejector for Vegetable Slicer
650237	Stainless steel slicing disc 4 mm (dia. 175mm)
653886	Stainless steel slicing disc with serrated blade 2 mm (dia. 175 mm)
653887	Stainless steel slicing disc with serrated blade 4 mm (dia. 175 mm)
CC0HNS	Precision disc set dia. 175mm (2mm & 4mm serrated slicer, 3mm grater, 10mm slicer, 10x10mm grid)

Discs/grids 205mm

650110	Cleaning tool for 5-8-10 mm dicing grids
653632	Support for 1 disc, diam. 175mm and 205mm



PNC Code	Description
Other accessories	
CC0HP9	Pizza/snacking disc set dia. 175mm (2mm & 4mm serrated slicer, 6mm slicer, 7mm grater)



Technical specifications

Electric

Supply voltage:	220-240 V/1N ph/50/60 Hz
-----------------	--------------------------


Capacity:

Performance (up to):	150 kg/hour
----------------------	-------------


Key Information:

External dimensions, Width:	348 mm
External dimensions, Depth:	315 mm
External dimensions, Height:	527 mm
Shipping weight (gross):	17.5 kg


Front

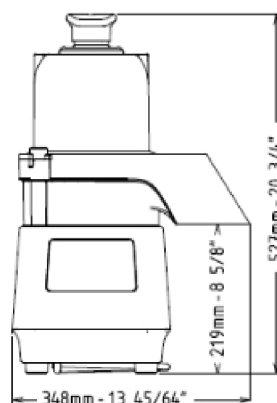

Side

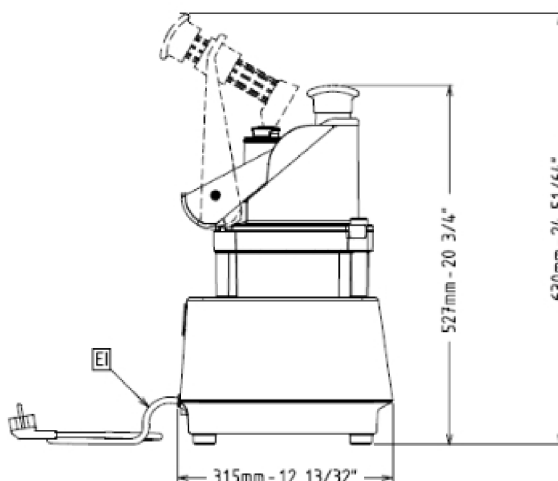

Top

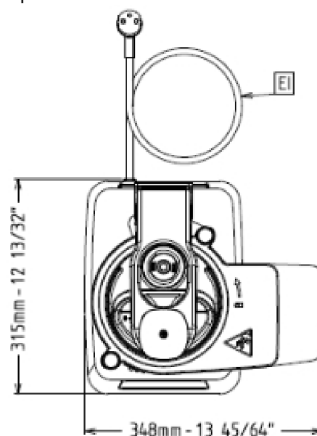

EI = Electrical inlet (power)



Find out more:
ISO Certificates
Electrolux Professional Recognitions

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026/09/10

4/4